


ACCESS

Suita Campus Map

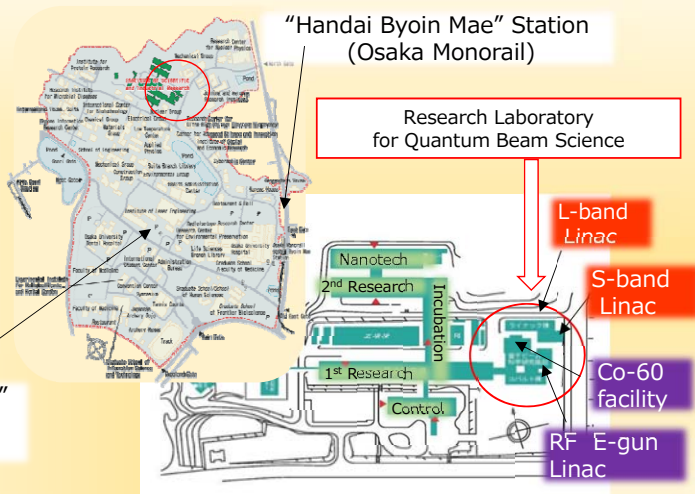


Research Laboratory for Quantum Beam Science Institute of Scientific and Industrial Research Osaka University

Co-60 γ -irradiation facility



150 MeV S-band electron linac



Cherenkov light




Electron linac & Co-60 γ -irradiation facility

Time-resolved RAMAN spectrum

Laser photocathode RF-gun S-band linac



L-band electron linac

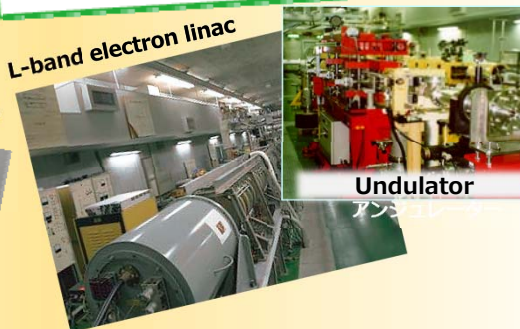

Undulator

New femtosecond electron linear accelerator using RF gun.

History

- 1957 Organizing Committee of Radiation-related laboratory started and a new laboratory named HOT LAB was established as a facility of Osaka University.
- 1964 Administration of the laboratory named Radiation Laboratory was moved to ISIR according to the revision of Regulations for national University.
- 1965 Administration for β -tron was moved to this laboratory from faculty of science.
- 1968 All the facilities in Radiation Laboratory were moved from Sakai campus to Suita campus.
- 1975 Construction of the L-band electron linac was decided.
- 1978 Construction of the L-band electron linac was completed and started operation.
- 1983 Joint-use of the L-band electron linac was started.
- 1989 150 MeV S-band linac was constructed and started operation.
- 1999 Future plan of the Radiation Laboratory was drawn up.
- 2002 The Radiation Laboratory was closed and a new organization having the same name was established in Nano Science and Nano Technology center of ISIR.
- 2009 The Research Laboratory for Quantum Beam Science was established.

Cooperative Laboratories

- Department of Advanced Nanofabrication http://www.sanken.osaka-u.ac.jp/en/organization/nnc/nnc_02.html
- Department of Molecular Excitation Chemistry <http://www.sanken.osaka-u.ac.jp/labs/mec/index2.html>
- Department of Beam Material Science http://www.sanken.osaka-u.ac.jp/en/organization/sec/sec_07.html

Contact



Research Laboratory for Quantum Beam Science
8-1 Mihogaoka, Ibaraki, Osaka 567-0047
TEL 06-6879-8511 FAX 06-6875-4346
<http://www.sanken.osaka-u.ac.jp/labs/rl/>



<OUTLINE>

The Research Laboratory for Quantum Beam Science (RLQBS) was established in 2009 as a successor of Radiation Laboratory. All facilities such as L-band electron linac, photocathode RF-gun equipped S-band electron linac and Co-60 γ -irradiation facility had been taken over. These are opened to users in Osaka University, the members of Network Joint Research Center for Materials and Devices all over Japan, and also collaborators in the world. Frontier beam science relating to environmental material science, new energy sources, and advanced medical science and technology as well as fundamental beam science are promoted. The management including operation, maintenance, and the safety control of radiation related facilities are also conducted.


<Research Topics>

- ① Application of quantum beam science to the fields of environmental science, new energy technology and advanced medical technology.
- ② Development and application of advanced quantum beams.
- ③ Research and development of analyzing methods of materials using quantum beams.
- ④ Radiation induced reactions in organic molecules and photocatalytic semiconductors.

L-band electron linac

The L-band linac was constructed in 1978 to generate an intense singly bunched electron beam with pulse width of 20 picosecond. Acceleration power is supplied by 30 MW L-band klystron. After the improvement of bunching system and the electron gun, the charge per single bunch was increased up to 91 nC. Such intense electron beam has been mainly used to study transient phenomena in the range from nanosecond to sub-picosecond with a pulse radiolysis system, and also used as a tool of free electron laser (FEL) to produce far-infrared light.

Domain expansion of radiation chemistry which made full use of various spectral methods




- Application for transient spectroscopy and electron spin resonance technique
- Application for time-resolved RAMAN spectroscopic measurement
- Consideration of complicated and realistic systems: biomolecule and interfacial phenomena

Examination from basic physical chemistry based on radiation chemistry to a device

- Electric charge non-local existence of conjugated systems
- Reactive examination of the excitation radical ion
- Examination of the emission of light mechanism of the electrochemical luminescence diode
- Elucidation of the photocatalytic reaction mechanism
- Charge transfer in DNA and structural change
- Protein folding mechanism induced by pulse radiolysis


Time-resolved RAMAN spectrum

THz light condensed to the pencil core





Development of Secondary Beams


- Slow positron beam
- THz Light
- EUV Light

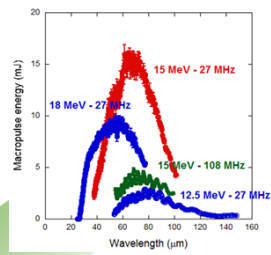

Scientific and technological innovation based on next generation THz light

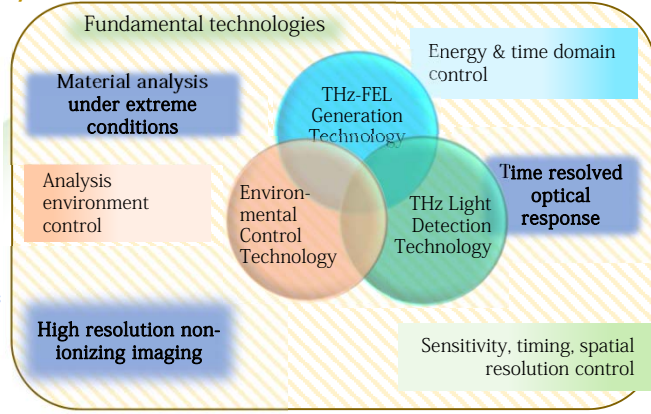


Radiation damage of DNA



TiO₂ photocatalytic reaction

Development of new type resist



10nm lines fine etching

Green innovation

Quantum Beam

Material science

Life innovation

The Co-60 γ -irradiation facility is equipped with 3 Co-60 γ -ray sources and two irradiation caves are available. This facility has been utilized in the fields such as irradiation effects on materials and tissues, radiation induced polymerization, radiation damages on materials, radiation hazard on biological system and so on.


Co-60 γ -ray irradiation facility

It is effective for new material development and radiation use for environmental protection, cancer medical treatment, etc. it is also useful for research in a field of space development.



Femtosecond/attosecond pulse radiolysis


- Generation of femtosecond/attosecond electron beams
- Study on radiation-induced ultrafast reactions
- Electron and hole transfer in liquid solvents
- Solvation, geminate recombination in radiation chemistry




Femtosecond time-resolved relativistic-energy electron microscopy

- Ultrafast structural dynamics
- Macromolecular structure
- Making molecular movie
- Nano-technology/science

Promotion of joint use, and activation of industrial use!

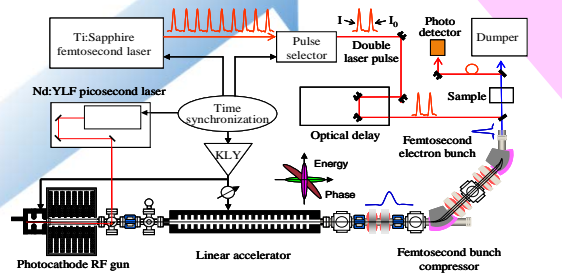


Photocathode RF gun linac & femtosecond pulse radiolysis



Dynamical analysis with positron

- functional polymer
- local deformation relating to functional groups

Detection of swelling process in PEMFC

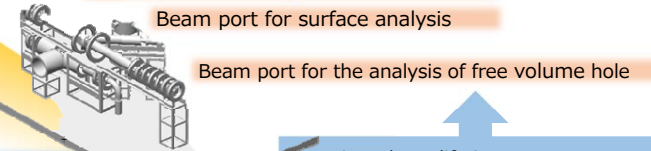

Beam port for surface analysis

Beam port for the analysis of free volume hole

Generation of second beam and use

- Slow positron beam

positron/o-Ps lifetime measurement
Doppler broadened annihilation photo peak measurement

RF-gun S-band Electron Linac

The linac consists of a 1.6-cell S-band photocathode RF electron gun, a 2-m-long traveling-wave linac, and a magnetic bunch compressor. Picosecond electron beams are generated in the RF gun using a Nd:YLF picosecond laser. The electron beams are accelerated in the linac up to 32 MeV, and finally are compressed into femtoseconds. The shortest single-bunch electron beam is 98 fs. A femtosecond pulse radiolysis with time resolution of 240 fs has been developed successfully for the study of radiation chemistry.

S-band linac was developed in 1990. This linac consists of three acceleration tubes and a thermionic gun which can accelerate electron bunch up to 100 MeV with the current of 0.25 A in a representative operation. The bunch length is two microseconds and its repetition is less than 30 Hz. This linac has been dominantly used to produce positron beam.

S-band Electron Linac